



STEALTH® Hydraulic Torque Wrench

The STEALTH is the industry's most advanced low-clearance tool. The slim design fits where other tools will not and the dual piston powerhead provides unparalleled speed and power. Also compatible with the HYTORC Washer and HYTORC Nut, the STEALTH can conquer bolting applications from general maintenance to critical pathways.

HANDS-FREE OPERATION



For the highest level of safety on industrial bolting jobs, HYTORC recommends hands-free operation. The STEALTH Lock-On adapter allows for hands-free usage with or without the HYTORC Washer.

DUAL-PISTON POWER




The patented design of the STEALTH's dual pistons provides more speed than any other limited clearance tool in the market.

SLIM DESIGN



The STEALTH was the first industrial bolting system in the market to feature a continuous slim body design that fits in even the tightest of confines.

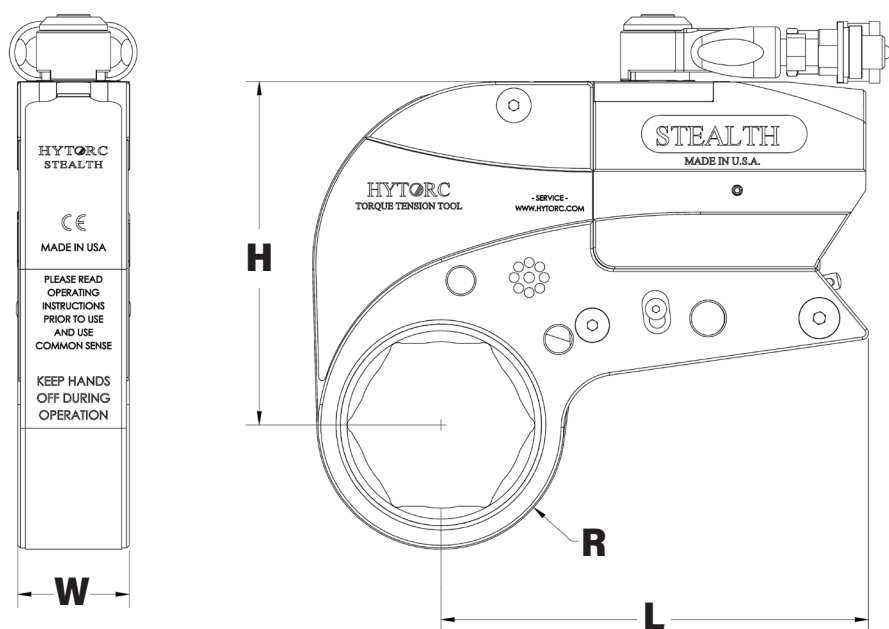

LEGEND: H = HEIGHT W = WIDTH L = LENGTH R = RADIUS

MODEL NUMBER	H	W	L	R	WEIGHT	TORQUE	
	IMPERIAL (in.)				lbs.	MIN (ft.-lbs.)	MAX (ft.-lbs.)
STEALTH - 2	4.21	1.25	5.53	1.03 - 1.76	4	278	1,869
STEALTH - 4	5.43	1.66	6.56	1.33 - 2.32	4.30	604	4,020
STEALTH - 8	6.40	2.18	8	1.77 - 2.89	6.70	1,199	7,984
STEALTH - 14	7.94	2.50	9.35	2.32 - 3.47	10.40	2,105	14,255
STEALTH - 22	9.18	2.91	10.80	2.62 - 3.87	15.40	3,250	21,875
STEALTH - 36	10.81	3.41	12.71	3.07 - 4.80	24.10	4,917	34,722

	METRIC (mm)				kg	MIN (Nm)	MAX (Nm)
STEALTH - 2	107	32	140	26.20 - 44.70	1.81	377	2,534
STEALTH - 4	138	42	167	33.80 - 58.92	2	819	5,450
STEALTH - 8	163	55	203	45.00 - 73.40	3.03	1,626	10,825
STEALTH - 14	202	64	237	58.92 - 81.13	4.71	2,854	19,327
STEALTH - 22	233	74	274	66.50 - 98.30	7	4,406	29,659
STEALTH - 36	275	87	323	78.00 - 121.92	10.93	6,667	47,077

The World's Most Trusted Industrial Bolting Systems

HYTORC

Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Email:
info@hytorc.com

Phone:
1-800-FOR-HYTORC

Online:
hytorc.com